


Mazak
OPTONICS CORP.
ΔUTOMΔTION



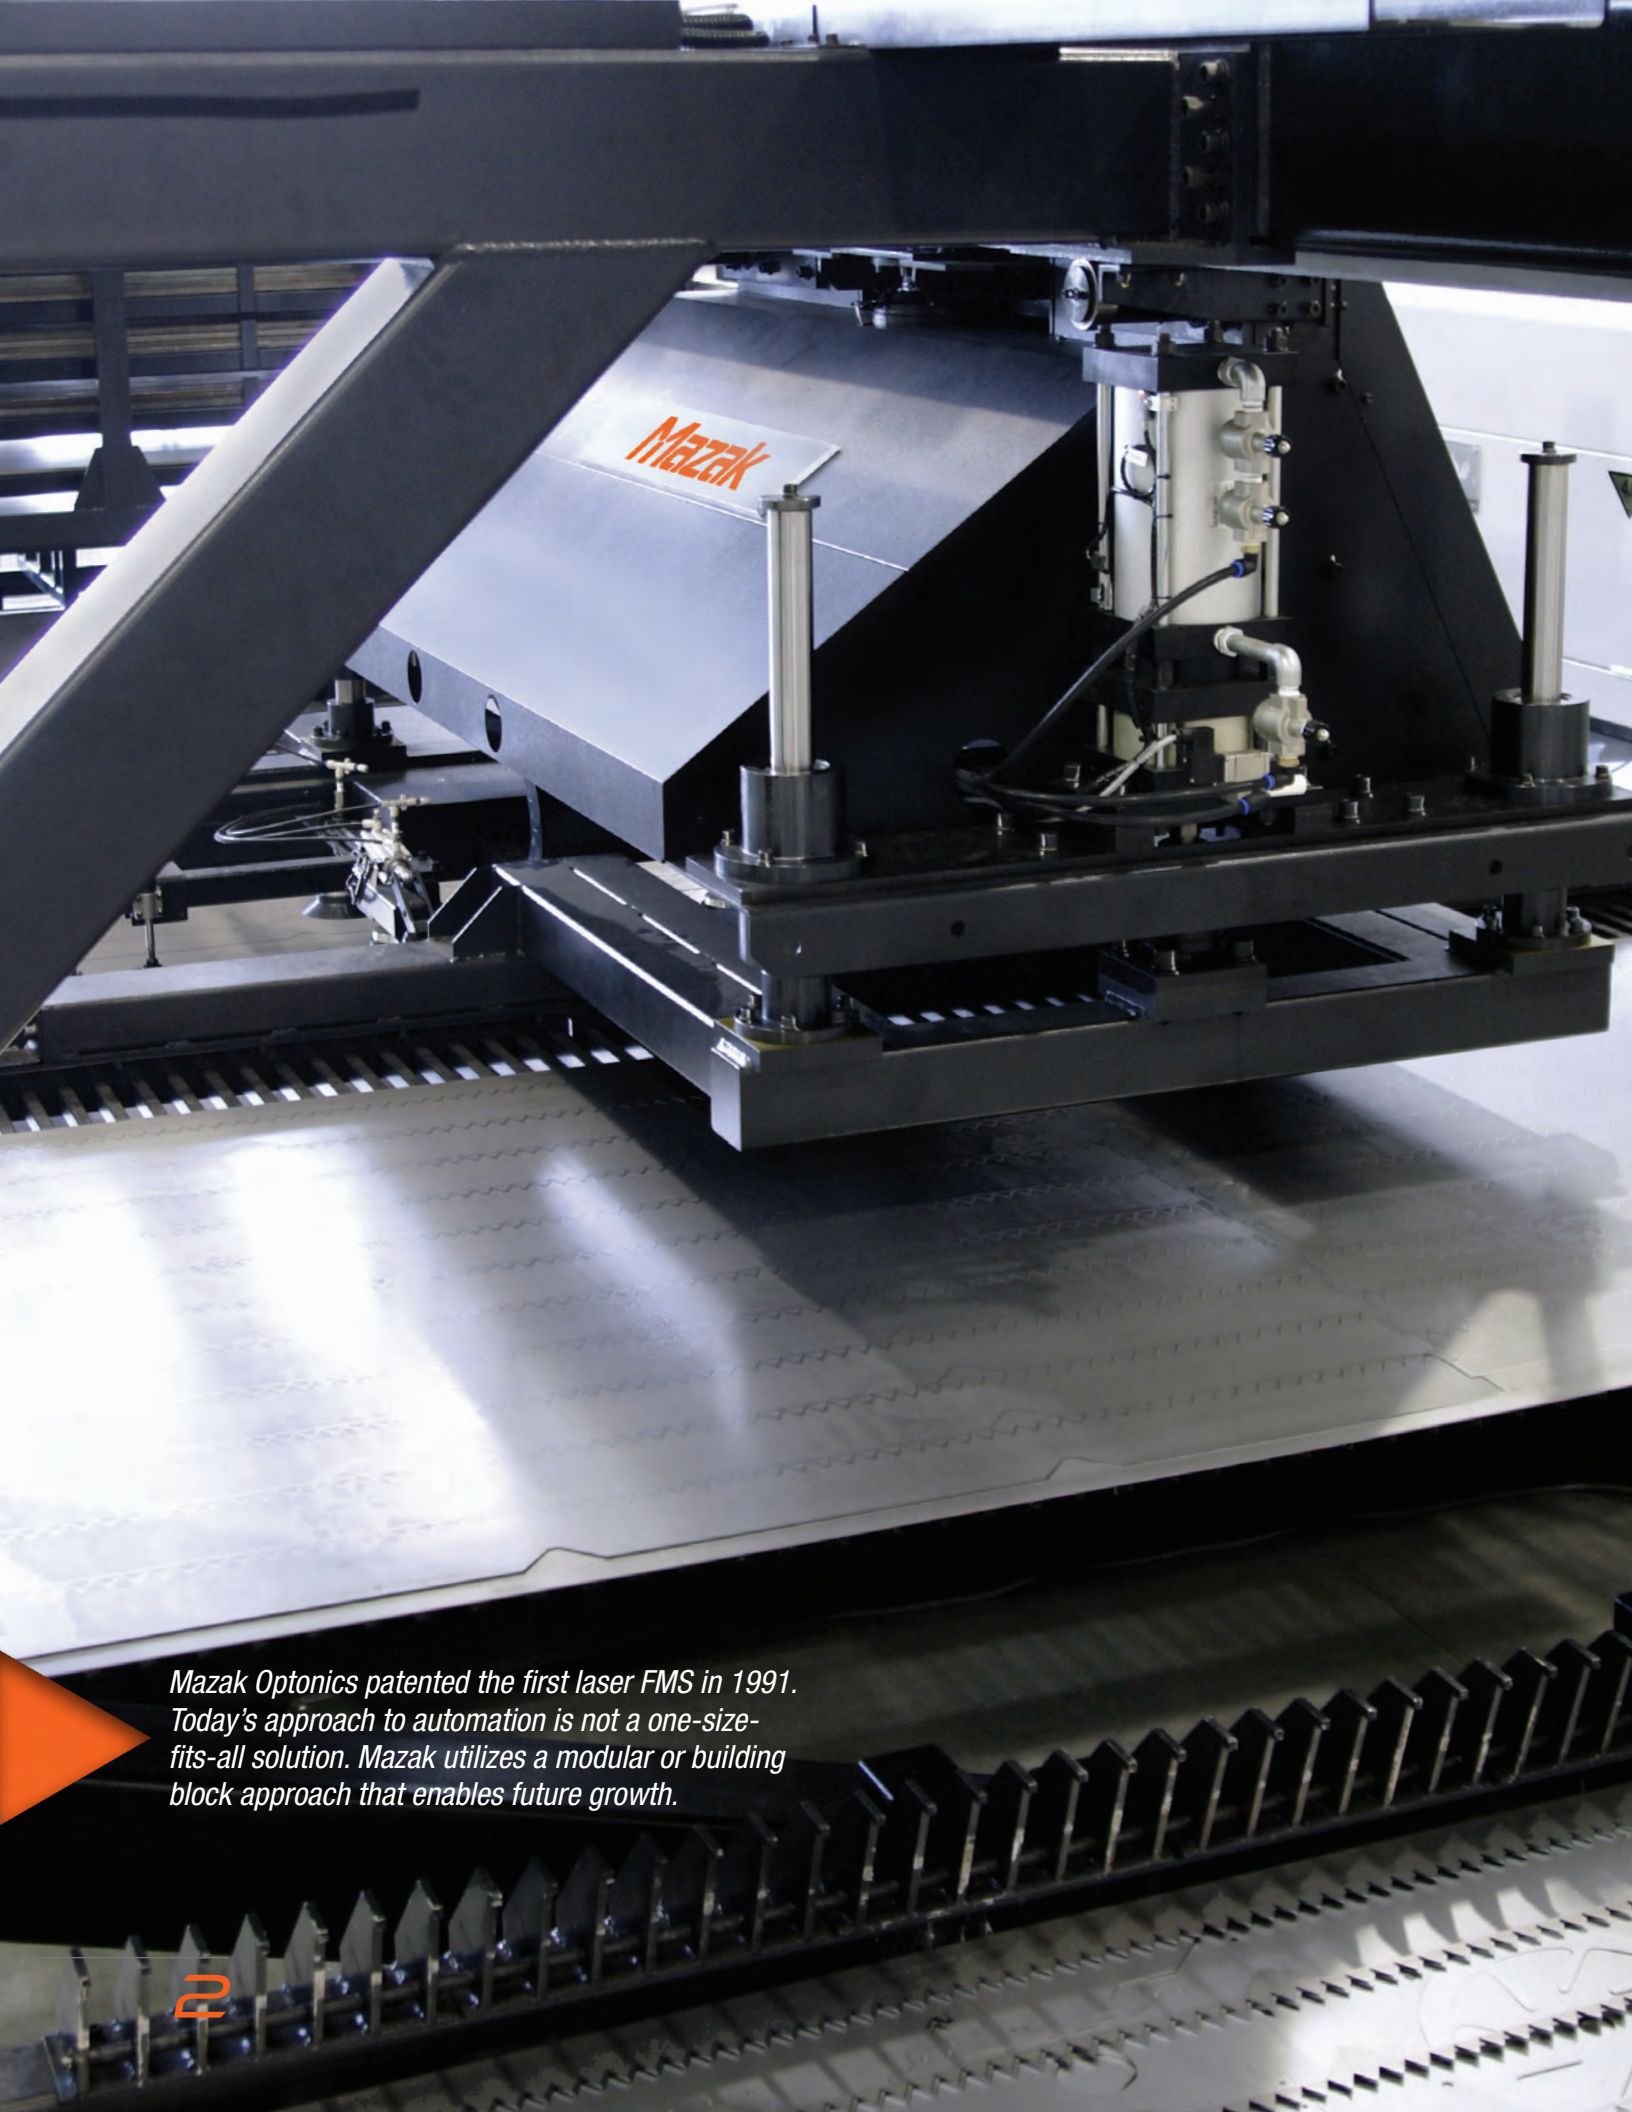

Mazak Optonics patented the first laser FMS in 1991. Today's approach to automation is not a one-size-fits-all solution. Mazak utilizes a modular or building block approach that enables future growth.

MAZAK ADVANCED AUTOMATION

MATERIAL AUTOMATION SYSTEMS WILL EXTEND THE THROUGHPUT CAPACITY OF YOUR MACHINES

Automation systems provide the ability to flex capacity through lights-out operation, without the burden of adding manpower. It also makes one-piece flow more practical, while producing short-run efficiencies that will reduce non value-added fabricating time. The bottom line is typically up to a 50% increase in capacity as compared to standalone machines and a significant reduction in lead times.

Mazak was the first manufacturer to introduce laser-cutting machines into a Flexible Manufacturing System (FMS). Today we offer the following systems:


- QUICK CELL Compact Load/Unload Systems
- EXTENSIBLE MANUFACTURING CELL
- M-Series Automation Systems
- K-Series Automation Systems
- L-Series Automation Systems
- C-Series Automation Systems
- LASER FLEX Modular Automation Systems
- AUTOMATED STORAGE/RETRIEVAL

TABLE OF CONTENTS

TOPICS	PAGE
QUICK CELL	4
EXTENSIBLE MANUFACTURING CELL	6
M-SERIES	8
K-SERIES	10
L-SERIES	12
C-SERIES	13
SORTEK	14
LASER FLEX	16
AUTOMATED STORAGE/RETRIEVAL	18
ADDITIONAL PRODUCTIVITY SOLUTIONS	20
MAZAK iSMART FACTORY	22

AUTOMATION PRODUCTIVITY

1. Standalone Shuttle Table 52%
2. Load/Unload System 75%
3. Flexible Manufacturing System 92%

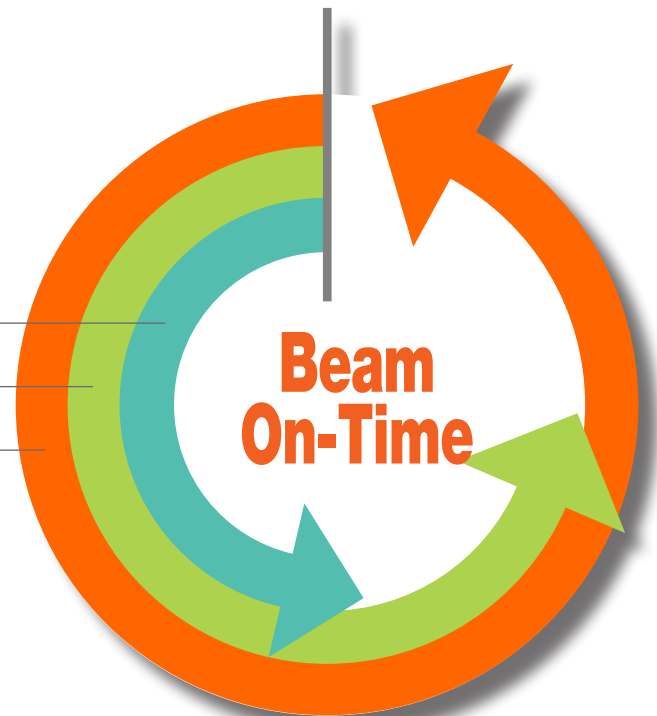

The compact QUICK CELL 3015 is an economical solution for job shops or small batch production environments.



Watch the QUICK CELL
Demo Video



COMPACT SINGLE MACHINE AUTOMATION WITH AN ECONOMICAL INVESTMENT

The QUICK CELL 3015 Compact Automation Cell utilizes rugged construction and an innovative design to deliver high performance for fabrication job shops and production environments. The base design is a very compact load/unload, which can be configured as a full FMS with 6, 10 or 14 shelves. The number of shelves for material compared to finished parts can be specified at the time of order. QUICK CELL utilizes independent load and unload drive systems, reducing


work piece material changeover times. A scheduling unit is integrated into the QUICK CELL to simplify planning and operation. QUICK CELL is available in the following system configurations.

QUICK CELL 3015 with Pallet Changer Extension

QUICK CELL 3015 with 6 Level Stocker

QUICK CELL 3015 with 10 Level Stocker

QUICK CELL 3015 with 14 Level Stocker

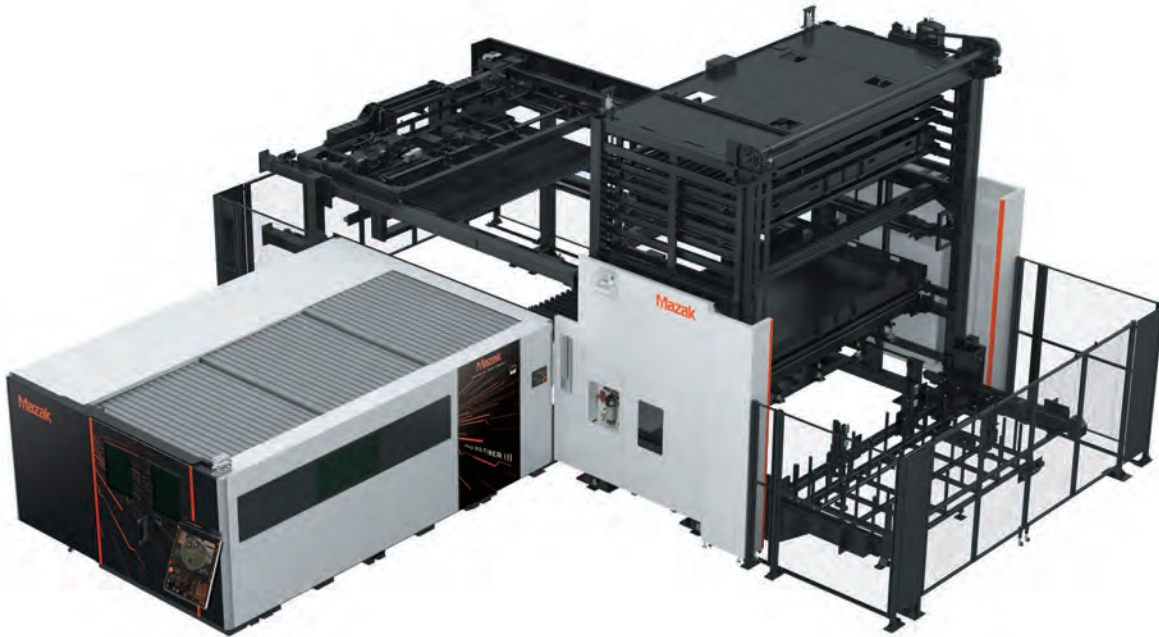

QUICK CELL 3015 WITH 6 LEVEL STOCKER

Model	QUICK CELL 3015 with Pallet Changer Extension	QUICK CELL 3015 with 6 Level Stocker	QUICK CELL 3015 with 10 Level Stocker	QUICK CELL 3015 with 14 Level Stocker
Number of machines serviced	1	1	1	1
Maximum sheet size	3000 x 1500 mm	3000 x 1500 mm	3000 x 1500 mm	3000 x 1500 mm
Maximum sheet thickness	25 mm	25 mm	25 mm	25 mm
Maximum pallet capacity	3,000 kg	3,000 kg	3,000 kg	3,000 kg
Number of shelves	na	6	10	14
Material stack height	90 mm	90 mm	90 mm	90 mm
Loading type	Suction cups	Suction cups	Suction cups	Suction cups
Unloading type	Rake	Rake	Rake	Rake
Load/unload cycle time	60 seconds	60 seconds	60 seconds	60 seconds
Connection to AS/R	na	na	na	na

Mazak's EMC series utilizes a modular approach that enables future growth. The standard configuration can expand to a total of four machines.



EXTENSIBLE MANUFACTURING CELL

Watch the EMC
Demo Video




RUGGED LINEAR MANUFACTURING SYSTEM FOR HIGH VOLUME THROUGHPUT


Mazak's EXTENSIBLE MANUFACTURING CELL (EMC) is an FMS system that utilizes a modular or building block approach that enables future growth. Mazak's EMC series enables you to modify your configuration as your needs change, including the

number of machines within the cell. Standard configurations can expand to a total of four machines. The rugged design and construction of EMC systems deliver high material storage/transfer capacities and a long production life. Available only in a 3015 configuration.


EXTENSIBLE MANUFACTURING CELL EXAMPLES

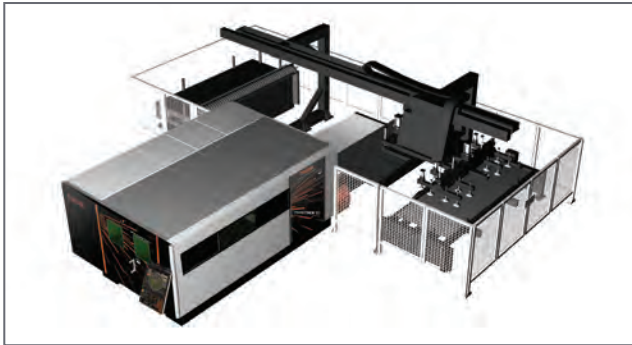


EMC 3015 ONE LASER (LUL)

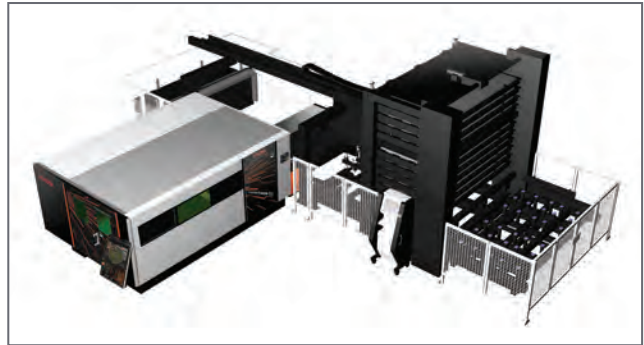

EMC 3015 ONE LASER + ONE TOWER

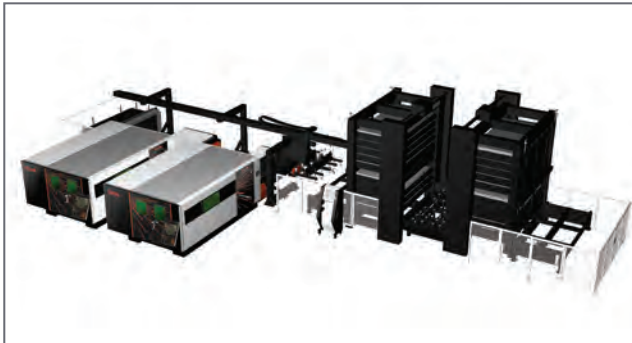

EMC 3015 TWO LASERS + TWO TOWERS

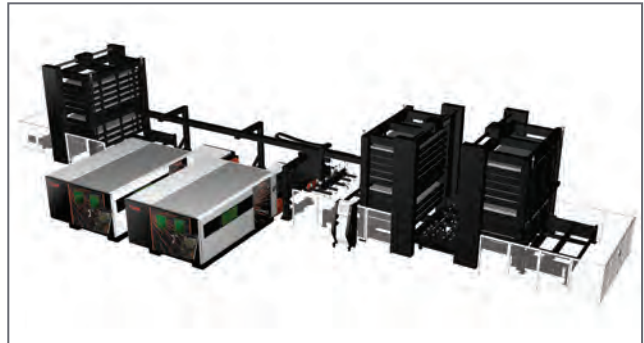

EMC 3015 TWO LASERS + TWO TOWERS + UL TOWER

Model	EMC 3015 one laser (LUL)	EMC 3015 one laser + one tower	EMC 3015 two lasers + two towers	EMC 3015 two lasers + two towers + UL tower
Number of machines serviced	1	1	2	2
Maximum sheet size	3000 x 1500 mm	3000 x 1500 mm	3000 x 1500 mm	3000 x 1500 mm
Maximum sheet thickness	25 mm	25 mm	25 mm	25 mm
Maximum pallet capacity	3,000 kg	3,000 kg	3,000 kg	3000 kg
Number of shelves	na	10	20 (loading)	30 (20 load, 10 unload)
Material stack height	90 mm	90 mm	90 mm	90 mm
Loading type	Suction cups	Suction cups	Suction cups	Suction cups
Unloading type	Rake	Rake	Rake	Rake
Load/unload cycle time	90 seconds	90 seconds	270 seconds	270 seconds
Connection to AS/R	No	No	No	No

M-Series automation solutions can handle work sheets from 1mm to 25 mm without changing hardware.

Watch the M-SERIES
Demo Video



MAXIMUM FLEXIBILITY FOR JOB SHOPS AND SHORT RUN PRODUCTION


Mazak's M-Series of automation is the most flexible solution for meeting difficult customer needs. A wide range of peripheral devices and functions expand the range of applications including conveyors, over/under carts and labelers. Systems feature a small footprint and highly customizable configurations.

M-Series systems are available in a variety of 3015, 4020 and reverse flow configurations. They can be integrated into an AUTOMATED STORAGE/RETRIEVAL System for even greater capacity.


Mazak's M-Series automation can incorporate systems to separate parts and automatically load them onto pallets in production environments.

Format	3015	4020
Number of machines serviced	Up to 3	Up to 3
Maximum sheet size	3000 x 1500 mm	4000 x 2000 mm
Maximum sheet thickness	25 mm	25 mm
Maximum pallet capacity	3,000 kg	3,000 kg or 5,000 kg
Number of shelves	Customizable to ceiling height	Customizable to ceiling height
Material stack height	85 mm raw/ 90 mm UL (customizable)	48 mm raw/ 60 mm UL (customizable)
Loading type	Suction cups	Suction cups
Unloading type	Rake	Rake
Load/unload cycle time	Under 60 seconds (based on one-laser configuration)	80 seconds (based on one-laser configuration)
Connection to AS/R	Yes	Yes


M-SERIES EXAMPLES

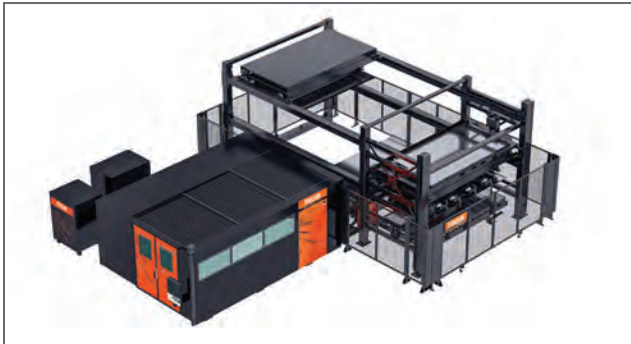


MCS 3015 ONE LASER (LUL)

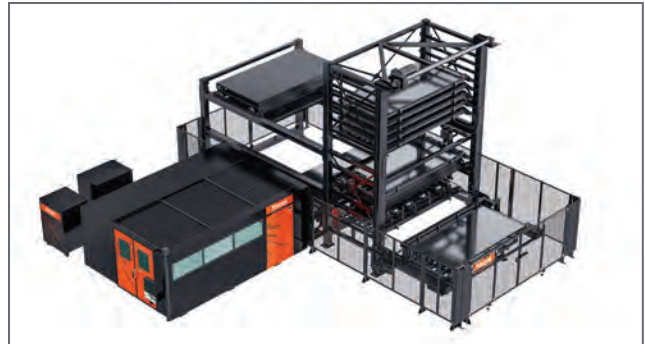

MST 3015 ONE LASER + ONE TOWER

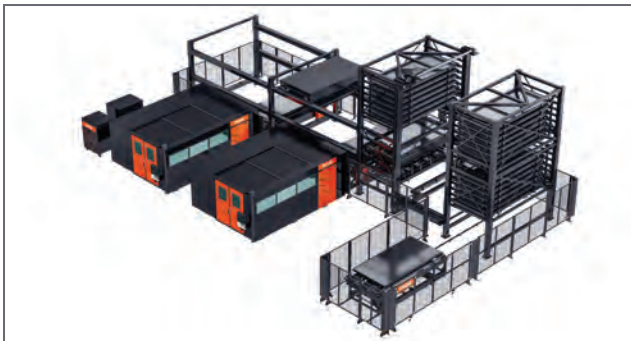


MDT 3015 TWO LASERS + TWO TOWERS

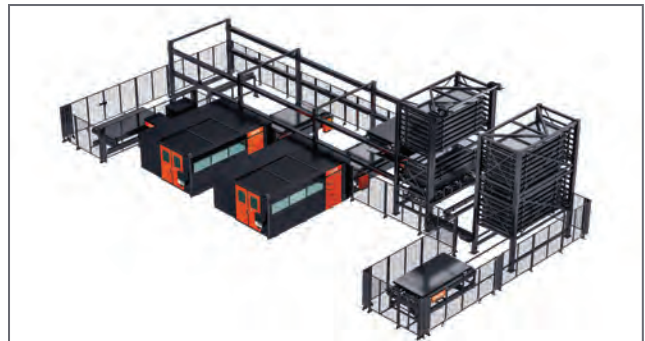

MDT 3015 TWO LASERS + TWO TOWERS + UL CART

K-Series automation solutions deliver a smaller footprint without limiting capabilities. It delivers flexibility ideal for a job shop environment.

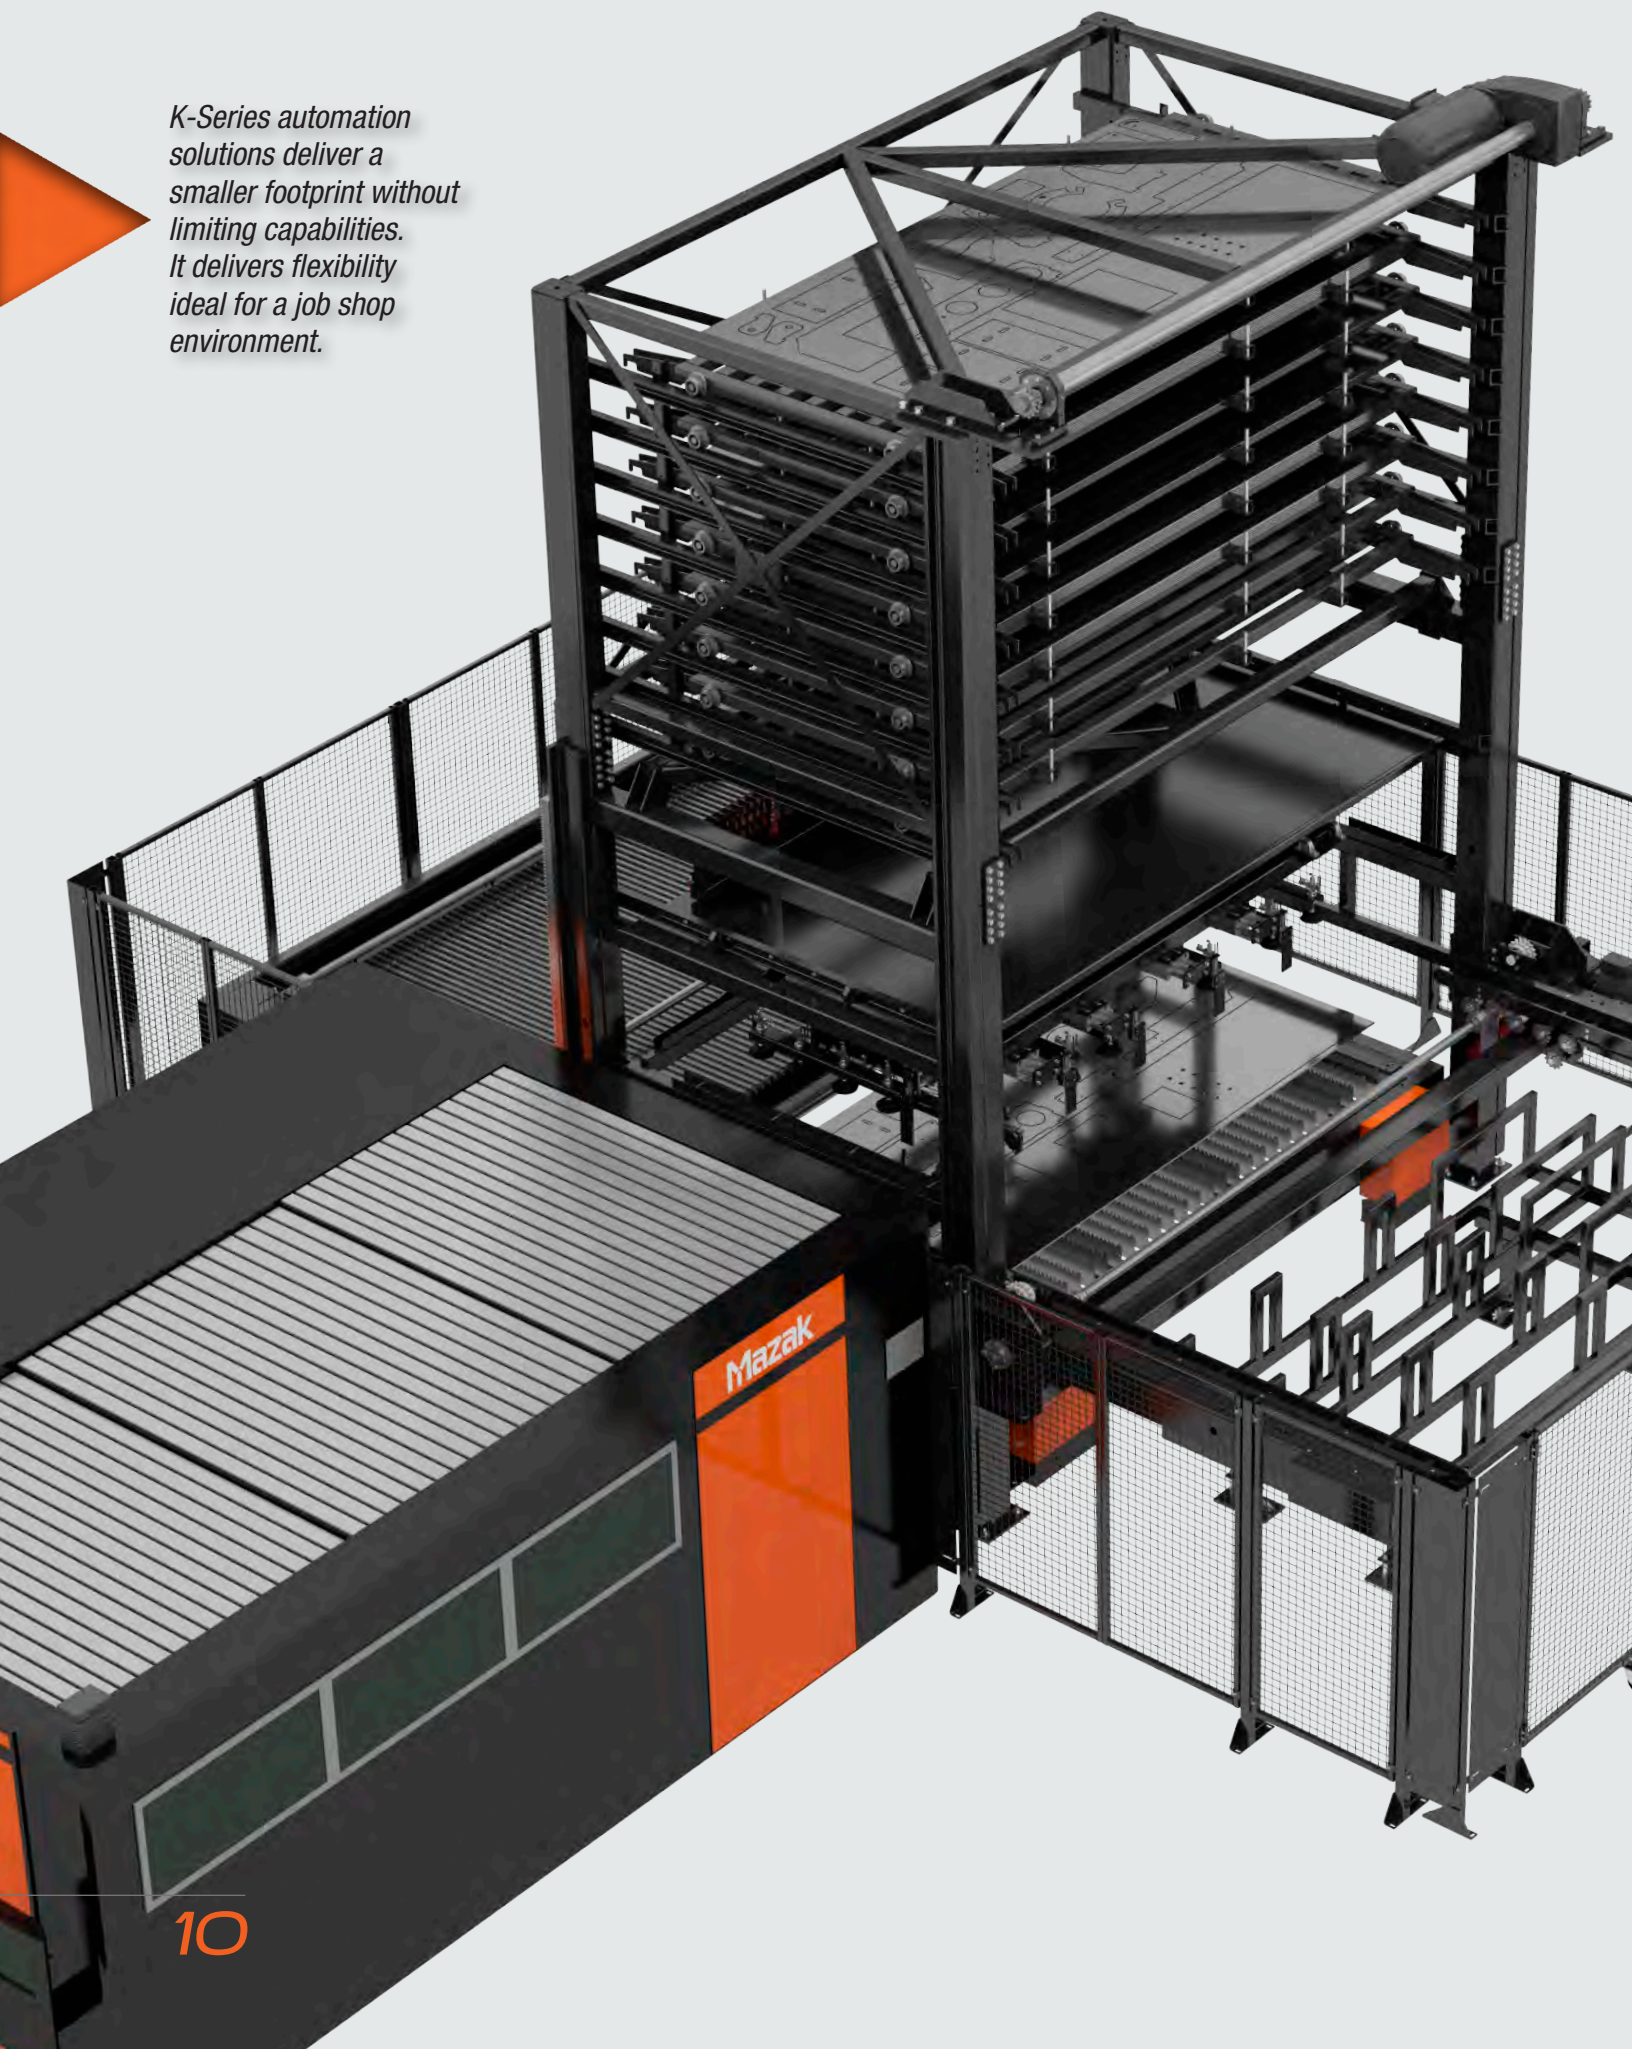

Watch the K-SERIES
Demo Video



MAXIMIZING THE AVAILABLE FLOORSPACE FOR JOB SHOPS

Mazak's K-Series automation is designed to maximize the available floor space by utilizing vertical space for job shops. The expandable design allows the customers to grow from load/unload to one material tower and two-tower storage system with all the cut parts returning to the towers. Available in a variety of 3015, 4020 and reverse flow configuration. It is limited to one-laser system.


Mazak's K-Series automation can also be designed to incorporate systems to separate parts and automatically load them onto pallets in production environments.

Format	3015	4020
Number of machines serviced	1	1
Maximum sheet size	3000 x 1500 mm	4000 x 2000 mm
Maximum sheet thickness	25 mm	25 mm
Maximum pallet capacity	3,000 kg	3,000 kg
Number of shelves	Customized based on ceiling height	
Material stack height	85/90 mm	48/60 mm
Loading type	Suction cups	Suction cups
Unloading type	Rake	Rake
Load/unload cycle time	60 seconds	80 seconds
Connection to AS/R	No	No


K-SERIES EXAMPLES



KCS 3015 ONE LASER (LUL)

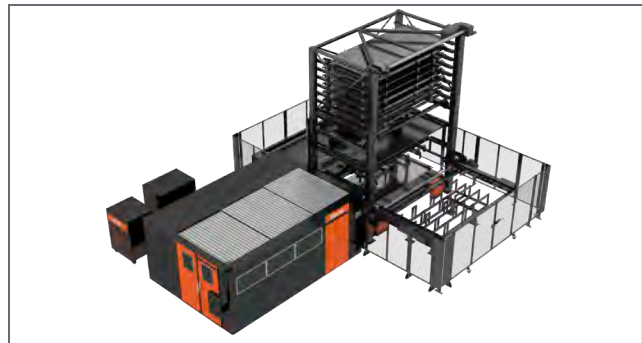

KST 3015 ONE LASER + ONE TOWER

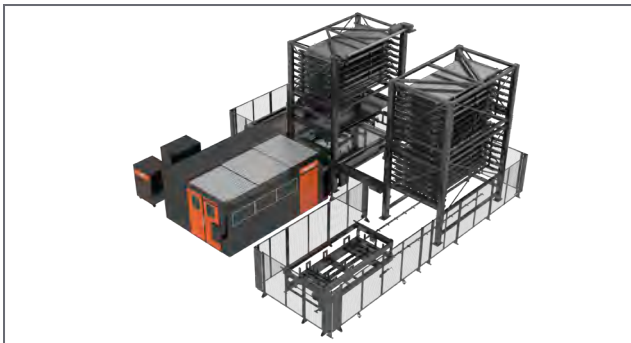

KDT 3015 ONE LASER + TWO TOWERS

L-SERIES



Watch the L-SERIES
Demo Video

GREAT FLEXIBILITY FOR NARROW SYSTEM FOOTPRINTS


Mazak's L-Series is an extension of the M-Series, but is designed to create a more linear footprint along a wall or other narrow workspace. A wide range of peripheral devices and functions expand the range of applications including conveyors, over/under carts and labelers.

Format	3015	4020
Number of machines serviced	1	1
Maximum sheet size	3000 x 1500 mm	4000 x 2000 mm
Maximum sheet thickness	25 mm	25 mm
Maximum pallet capacity	3,000 kg	3,000 kg
Number of shelves	Customized based on ceiling height	
Material stack height	85/90 mm	48/60 mm
Loading type	Suction cups	Suction cups
Unloading type	Rake	Rake
Load/unload cycle time	60 seconds	80 seconds
Connection to AS/R	No	No

L-SERIES EXAMPLES




LCS 3015 ONE LASER (LUL)

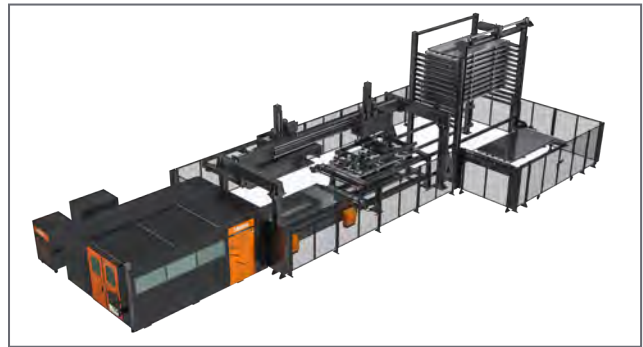

LST 3015 ONE LASER + ONE TOWER

L-Series automation cells transfer worksheets in-line with the machine's pallet changer system. The result is a system that can fit flatter against a wall and provides a more narrow footprint.

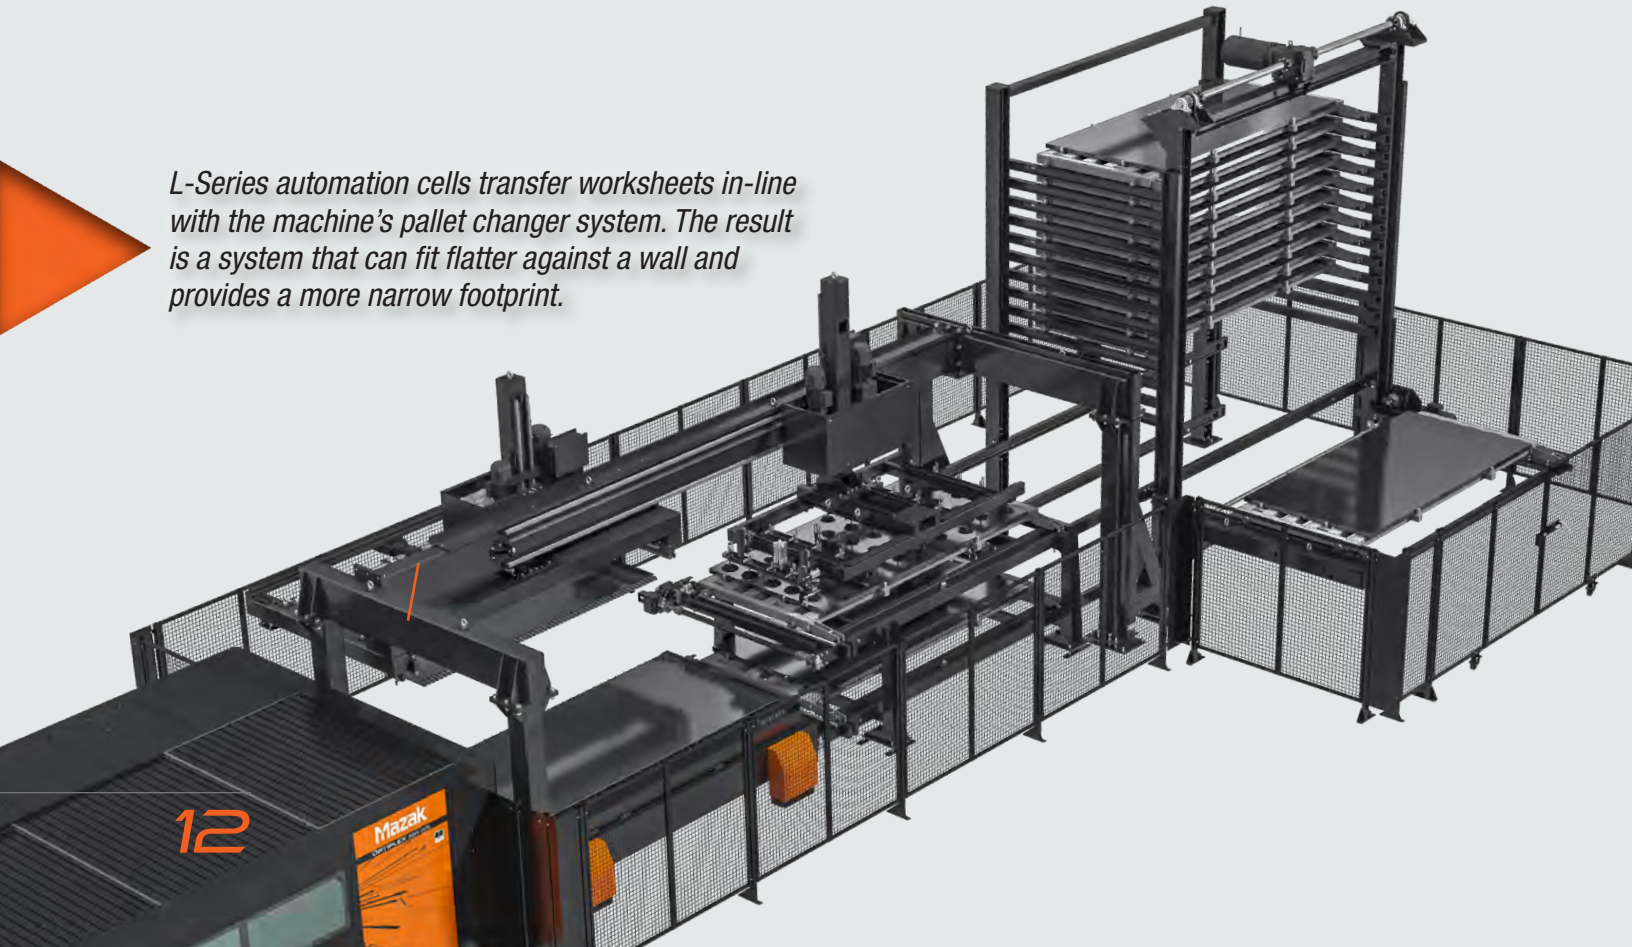




Watch the C-SERIES
Demo Video

COMPACT AND SIMPLE LOAD/UNLOAD FOR NARROW FOOTPRINTS


Mazak's C-Series is a simple load/unload system most suitable to place along the wall or limited floor space in small job shops. The system can be a lateral or frontal configuration, and it comes with one load pallet and one unload pallet for continuous production. Available in a variety of 3015 and 4020 configurations, and it is limited to one-laser system.

Format	3015	4020
Number of machines serviced	1	1
Maximum sheet size	3000 x 1500 mm	4000 x 2000 mm
Maximum sheet thickness	25 mm	25 mm
Maximum pallet capacity	3,000 kg	3,000 kg
Number of shelves	Customized based on ceiling height	
Material stack height	85/90 mm	48/60 mm
Loading type	Suction cups	Suction cups
Unloading type	Rake	Rake
Load/unload cycle time	60 seconds	80 seconds
Connection to AS/R	No	No

C-SERIES EXAMPLES

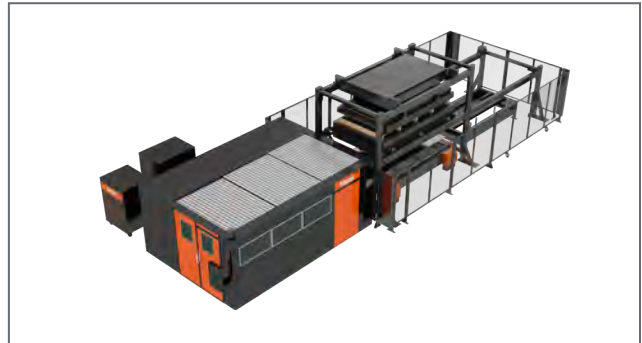



CSL 3015 ONE LASER (LUL - LATERAL)

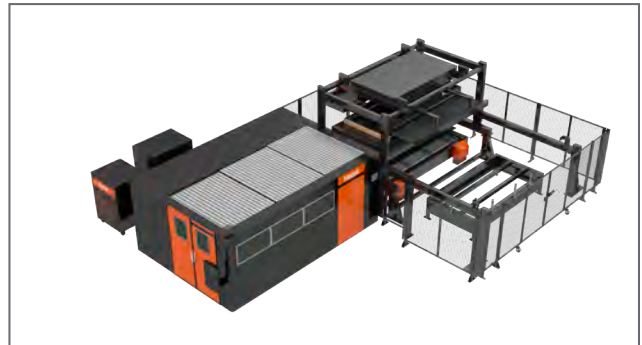

CSF 3015 ONE LASER (LUL - FRONT)

*The C-Series is a
compact and affordable
solution for single
machine automation.*

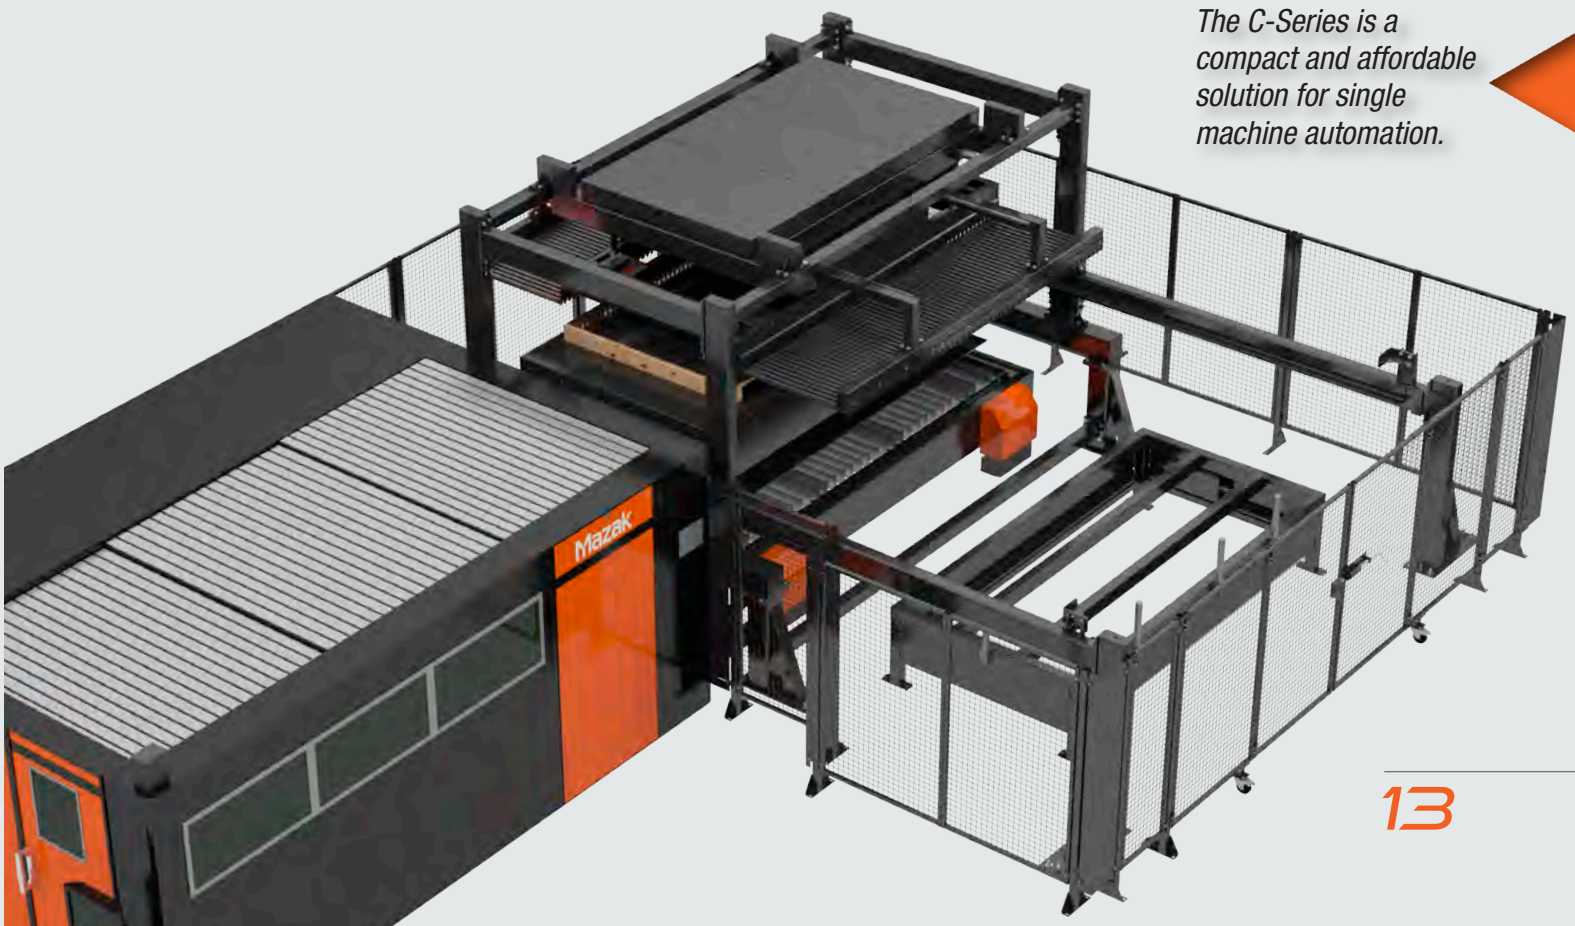

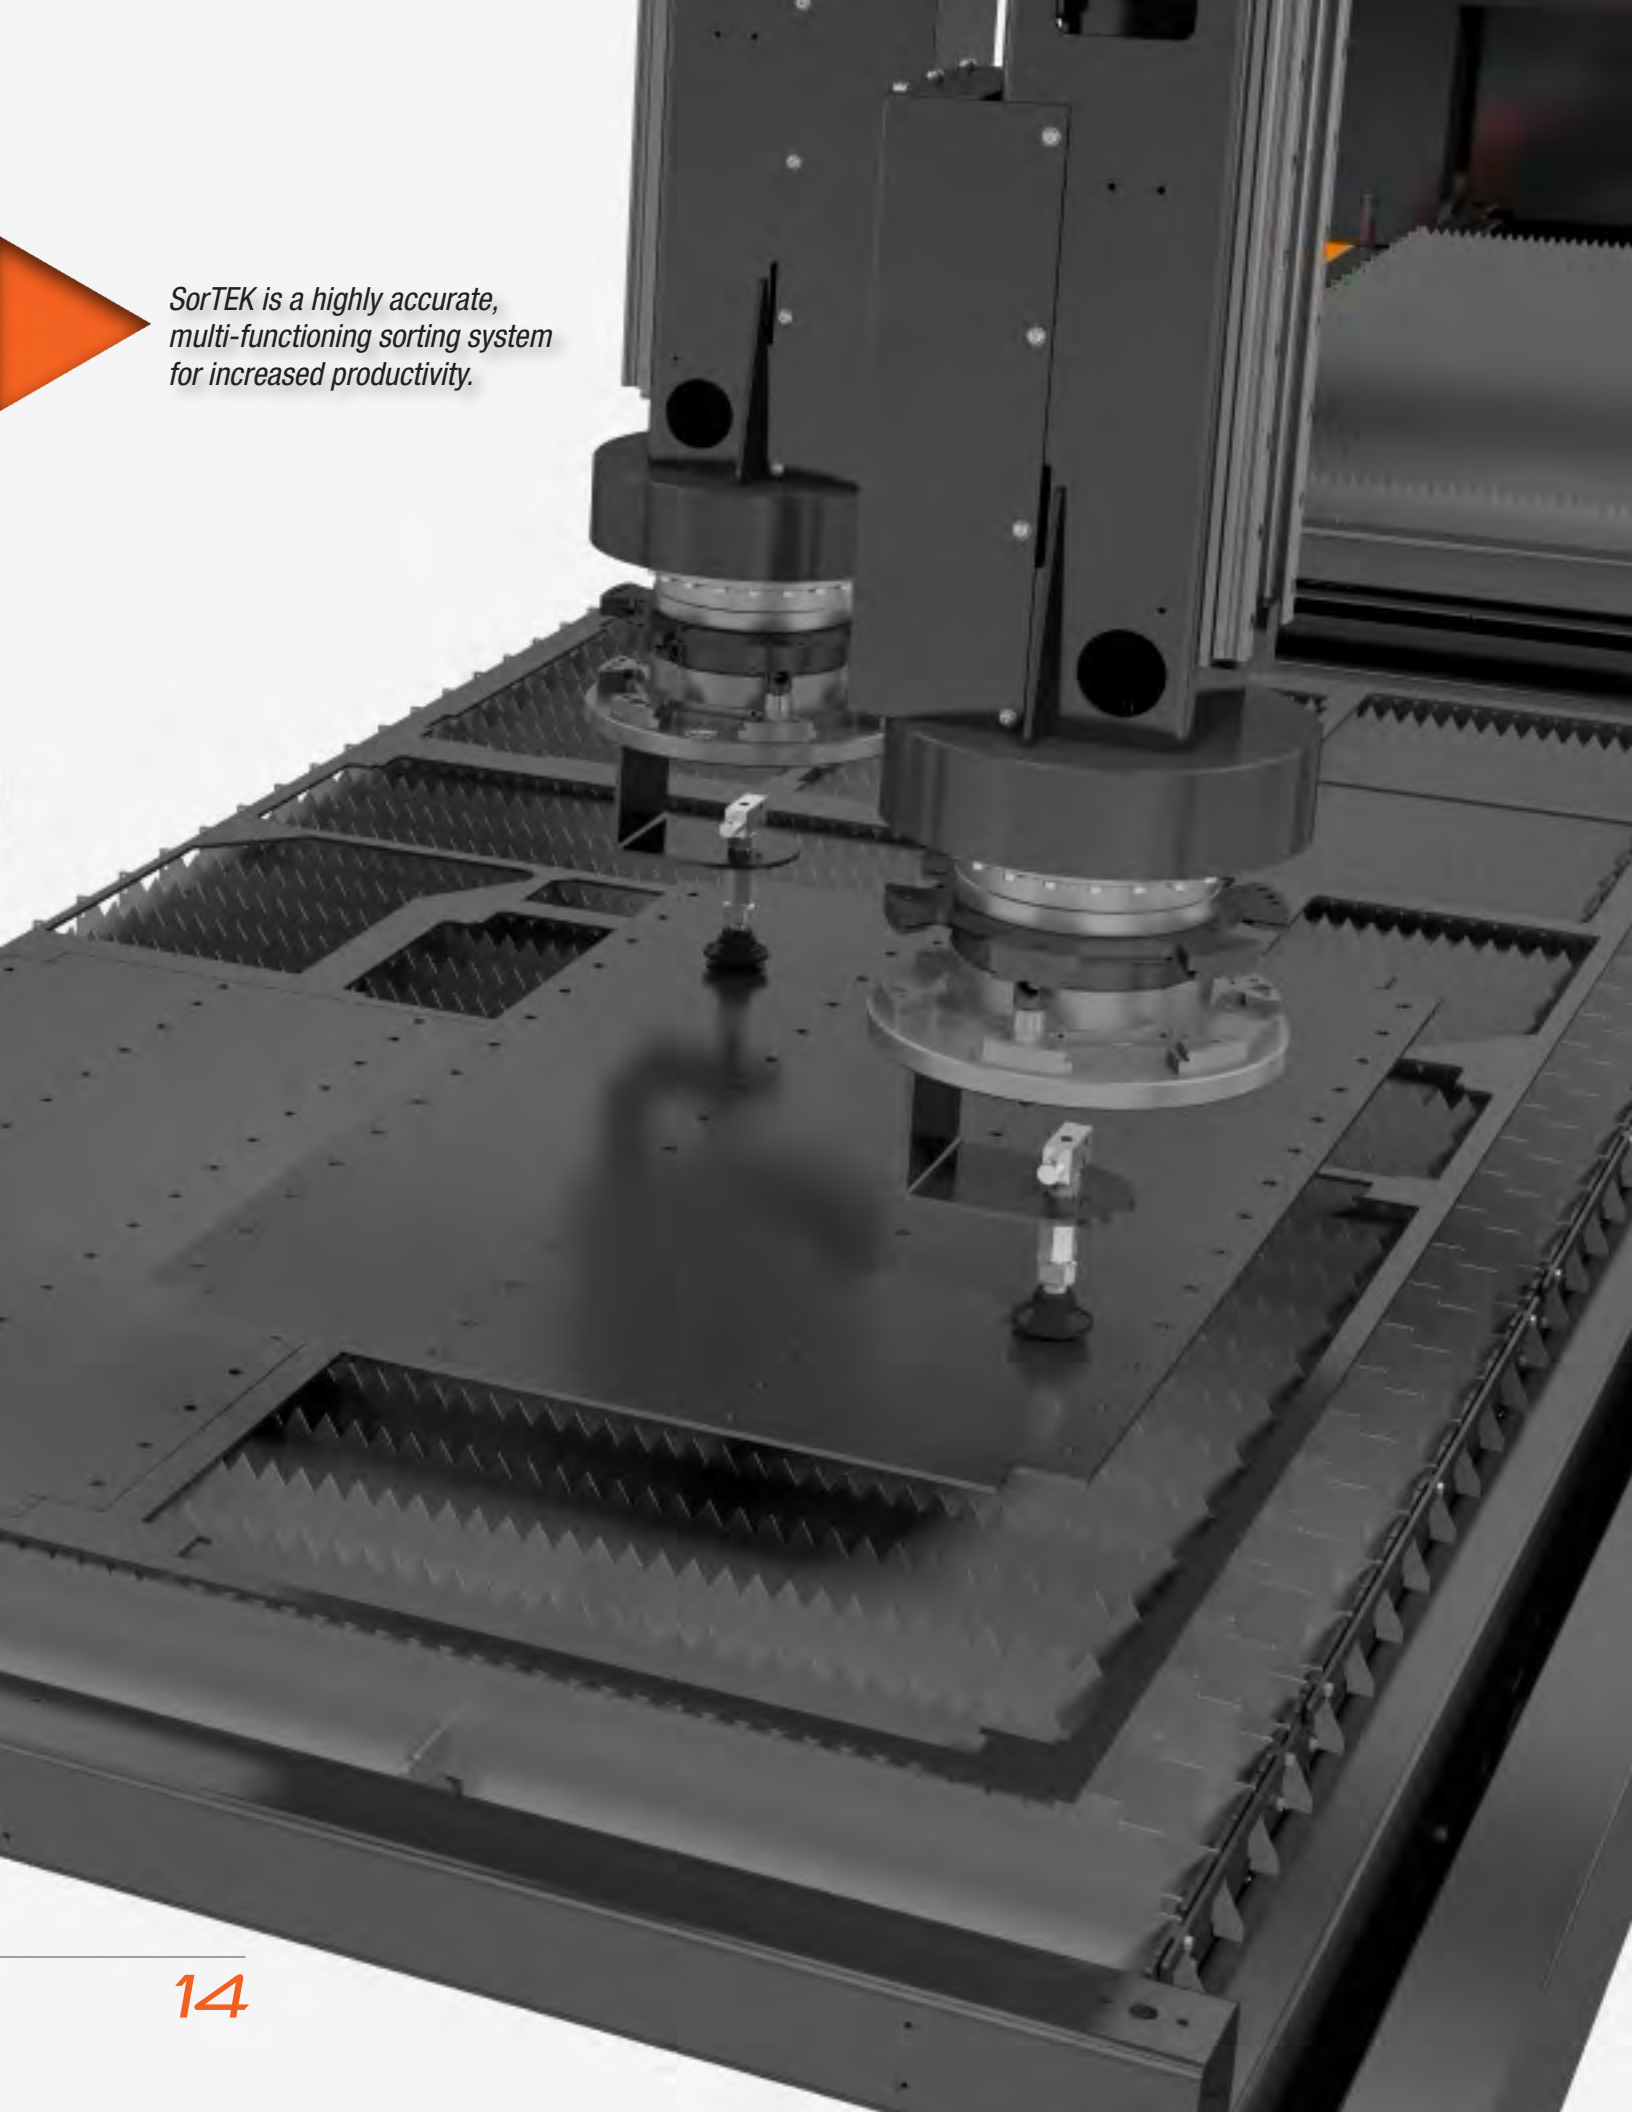A high-precision industrial sorting machine, the SorTEK, is shown in a close-up, low-angle view. The machine features a large, dark, perforated metal base with several rectangular sections. Two prominent vertical assemblies are mounted on the base, each consisting of a cylindrical body with a circular base and a vertical support structure. The background is a plain, light-colored wall.

*SorTEK is a highly accurate,
multi-functioning sorting system
for increased productivity.*

Watch the SorTEK
Demo Video





SORTEK MULTI-FUNCTION SORTING SYSTEM

Mazak's advanced part sorting system, SorTEK, provides for modular integration in a wide range of configurations. Sorting arms allow for both raw material loading, finished part sorting and skeleton removal. Multiple gripper options can be utilized both in tandem and singularly for higher productivity.

Format	3015	4020
Number of machines serviced	1	1
Maximum sheet size	3000 x 1500 mm	4000 x 2000 mm
Maximum sheet thickness	25 mm	25 mm
Loading type	Suction cups	Suction cups
Unloading type	Rake	Rake
Load/unload cycle time	60 seconds	80 seconds
Connection to AS/R	Yes	Yes
Gripper Type	Suction/Magnetic	
Maximum Part Weight	200lbs.	

SORTEK EXAMPLES

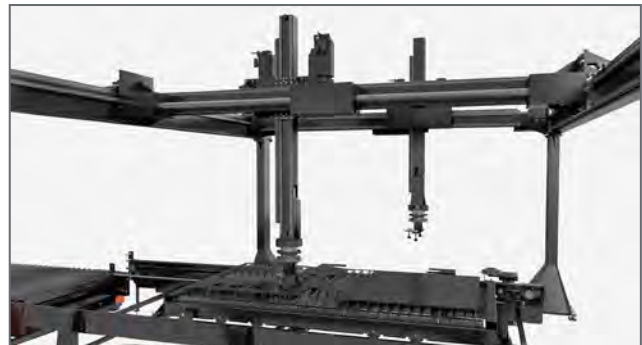

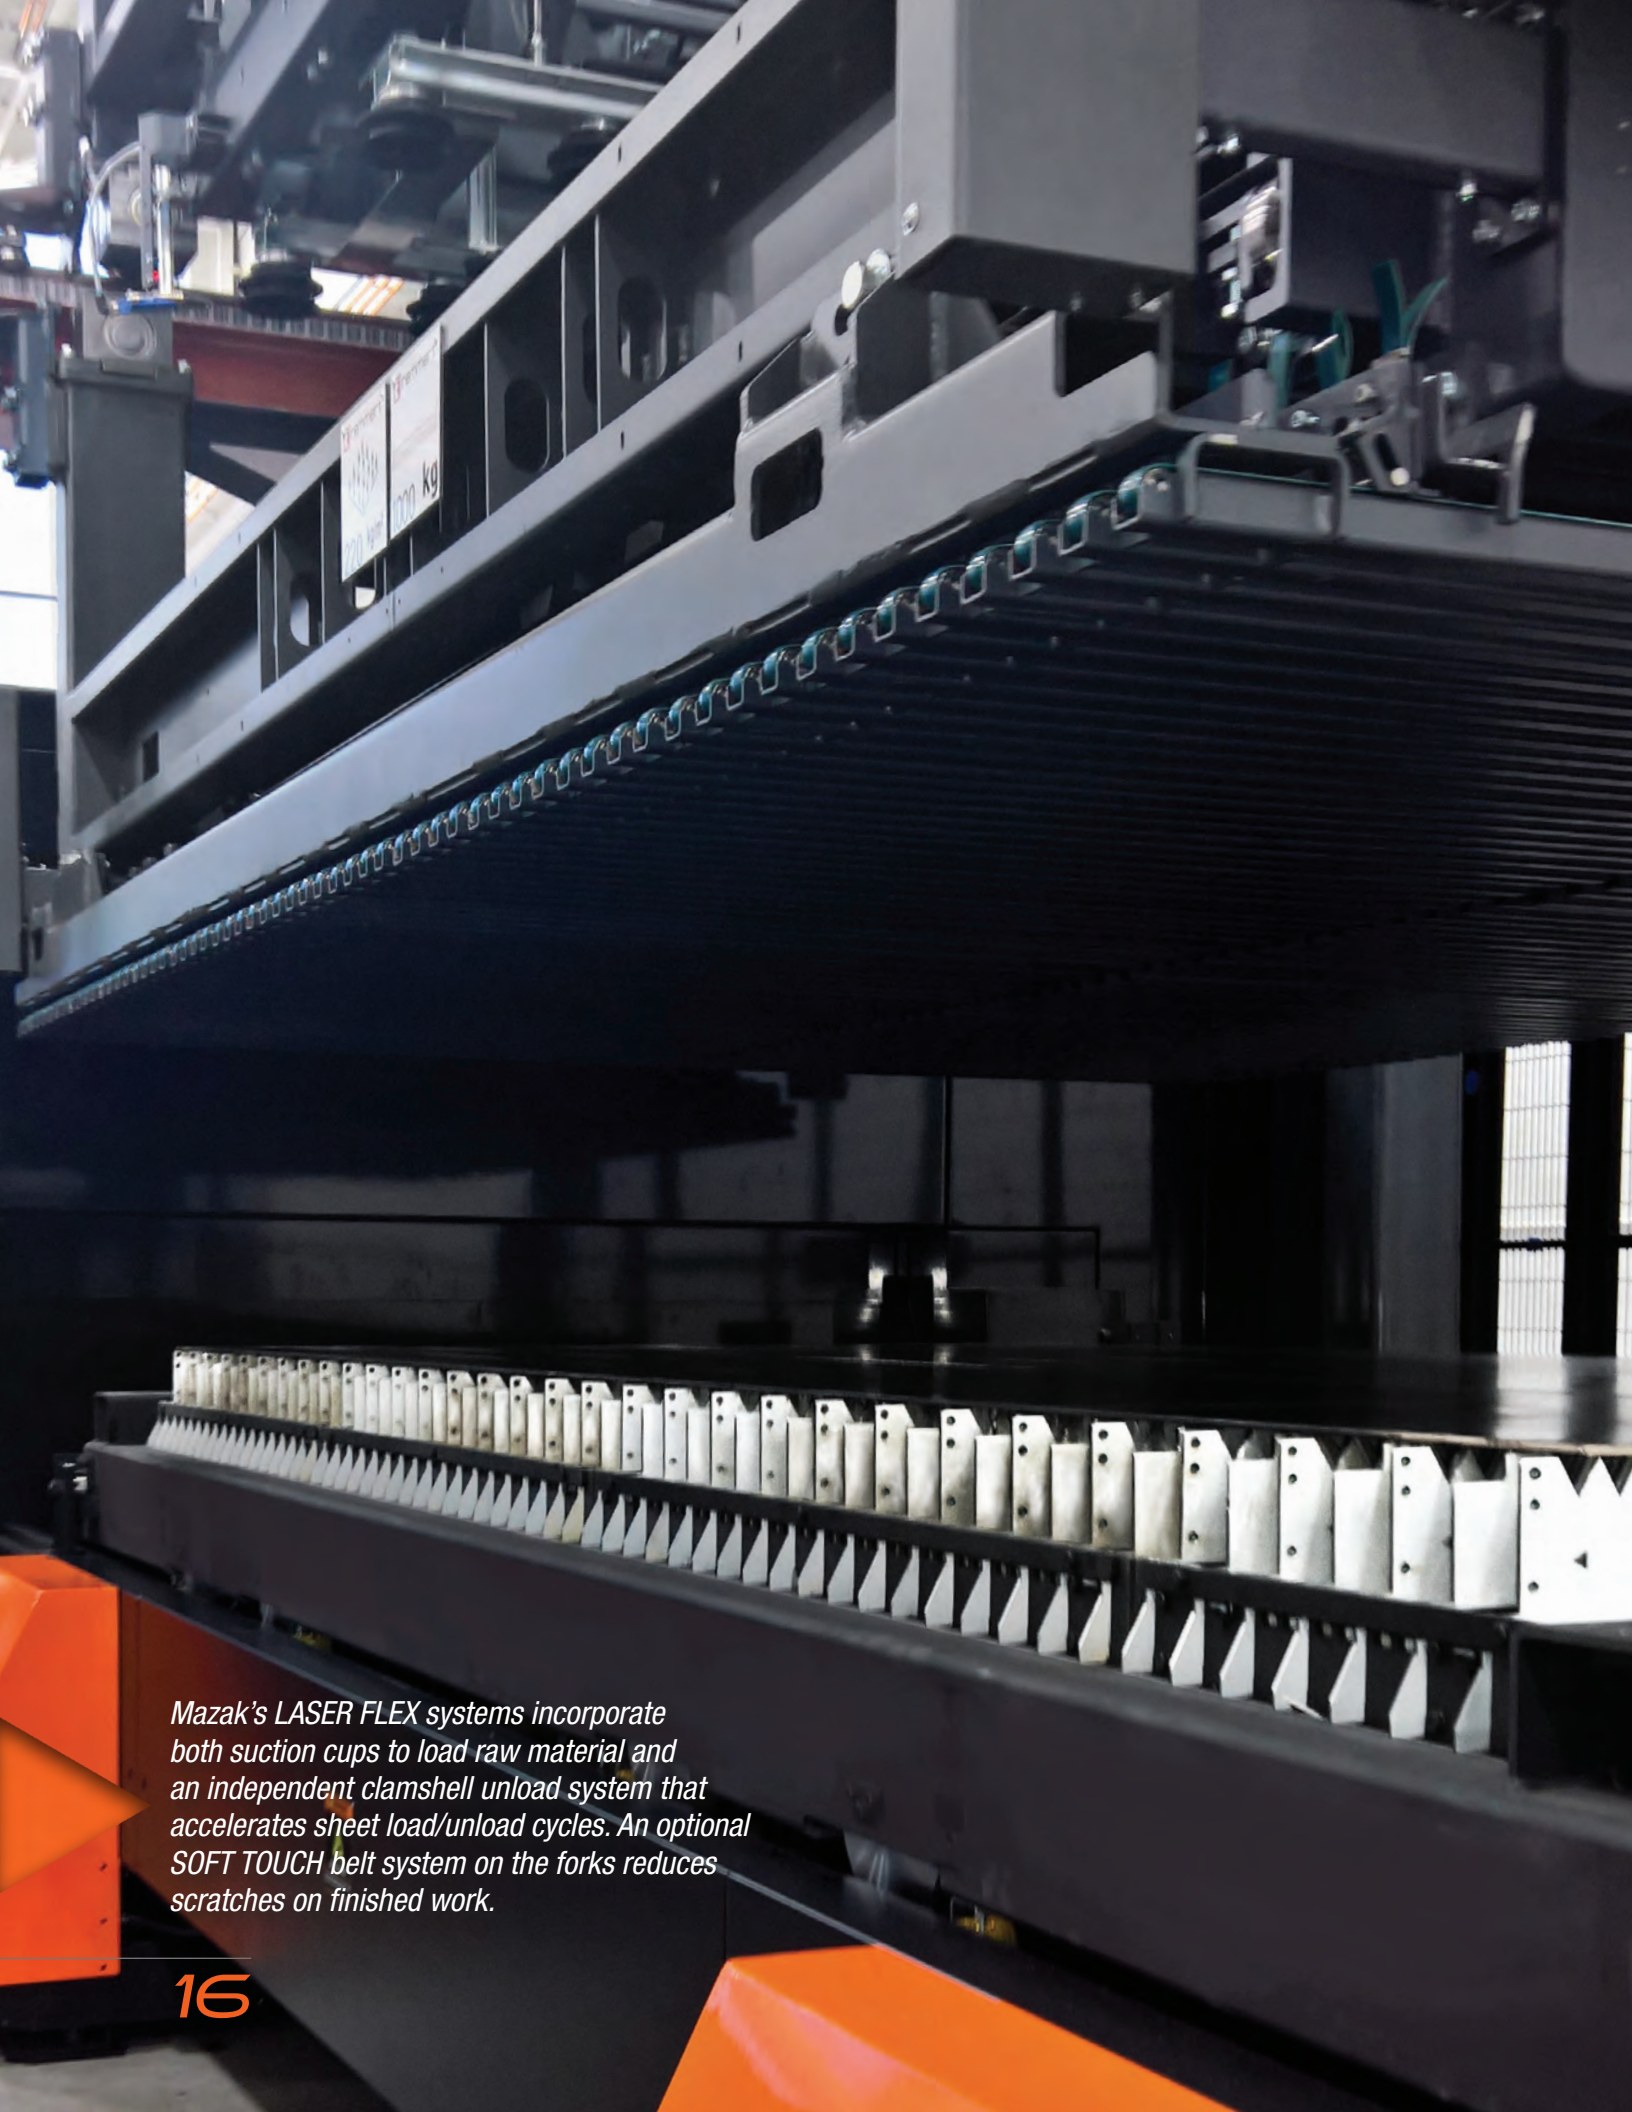

Mazak's LASER FLEX systems incorporate both suction cups to load raw material and an independent clamshell unload system that accelerates sheet load/unload cycles. An optional SOFT TOUCH belt system on the forks reduces scratches on finished work.

Watch the LASER FLEX
Demo Video



HIGH THROUGHPUT AUTOMATION SYSTEM FOR PRODUCTION ENVIRONMENTS

LASER FLEX automation systems are designed for high volume production environments. They have a modular design and are available in a wide range of configurations and features that can be customized to facilitate throughput. LASER FLEX systems utilize independent load/unload functions to accelerate sheet-to-sheet cutting productivity. Sheets are loaded utilizing a suction cup based system and unloaded by a clamshell fork system. The clamshell forks can optionally be ordered with a SOFT TOUCH belt system to reduce the possibility of scratching finished workpieces. Towers can be added for load/unload capacity while cart systems and conveyors allow workpiece separation as production continues.

LASER FLEX systems are available in a variety of 3015, 4020 and reverse flow configurations. They can be integrated into an AUTOMATED STORAGE/RETRIEVAL System for greater capacity.


Mazak's LASER FLEX automation can also be designed to incorporate systems to separate parts and automatically load them onto pallets in production environments.

Format	3015	4020
Number of machines serviced	Up to 3	Up to 3
Maximum sheet size	3000 x 1500 mm	4000 x 2000 mm
Maximum sheet thickness	25 mm	25 mm
Maximum pallet capacity	3,000 kg	3,000 kg or 5,000 kg
Number of shelves	Customizable to ceiling height	Customizable to ceiling height
Material stack height	90 mm standard (customizable)	60 mm standard (customizable)
Loading type	Suction cups	Suction cups
Unloading type	Rake	Rake
Load/unload cycle time	Under 60 seconds (based on one-laser configuration)	80 seconds (based on one-laser configuration)
Connection to AS/R	Yes	Yes


LASER FLEX EXAMPLES




LF 3015 ONE LASER (LUL)

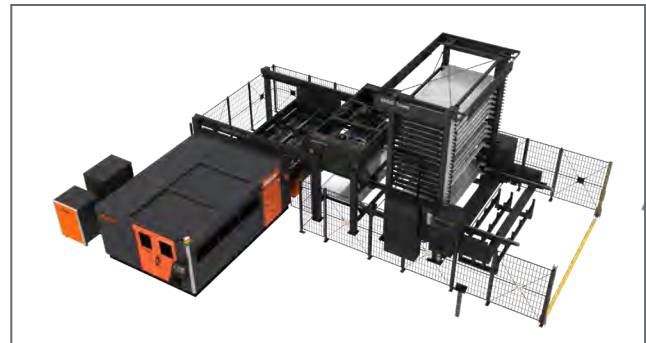


LF 3015 ONE LASER + ONE TOWER

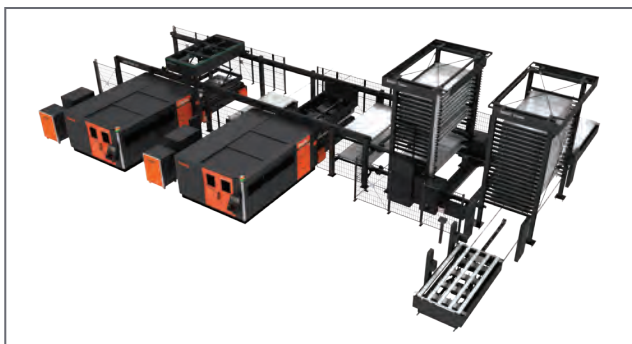

LF 3015 TWO LASERS + TWO TOWERS + UL CART

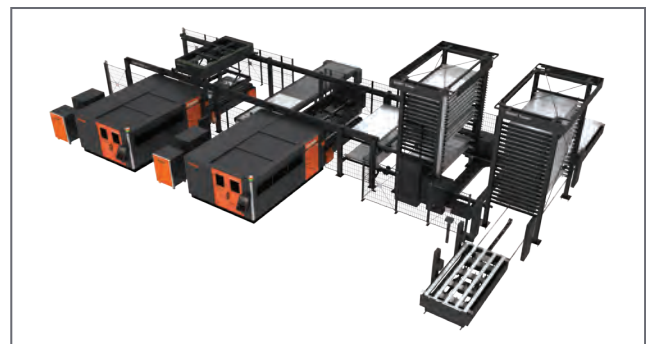

LF 3015 TWO LASERS + TWO TOWERS + CONVEYOR



*This AUTOMATED STORAGE/
RETRIEVAL SYSTEM
integrates two Mazak
OPTIPLEX fiber laser-
cutting machines to
maximize throughput of
components for the building
construction industry.*

AUTOMATED STORAGE/RETRIEVAL

Learn More
About the AS/R




MAXIMIZES SPACE, FLEXIBILITY AND OPERATIONAL EFFICIENCY

An AUTOMATED STORAGE/RETRIEVAL (AS/R) System is a strategic investment for a fabrication operation. It delivers a competitive advantage that enables manufacturers to meet changing customer demands with significant operational efficiencies. The benefits of an AS/R System include reduced labor for transporting material/worksheets into and out of inventory and optimizing floor space costs by storing vertically. Sheets are often stored more densely than in systems where they are stored and retrieved manually.


An AS/R System can be utilized to support all functions within your fabrication operation including cutting, bending, welding and finishing. The systems operate under computerized control, maintaining an inventory of stored sheets in various stages of production. The computer determines where in the storage area

the sheets can be retrieved and schedules the delivery through a system of conveyors and or automated robotic handlers that moves them to the manufacturing floor.

Mazak AS/R Systems can be integrated with LASER FLEX, MODULAR COMPACT, LATERAL COMPACT and EXTENSIBLE MANUFACTURING CELLS. They can be designed to store/retrieve 2412, 3015 and 4020 size worksheets.

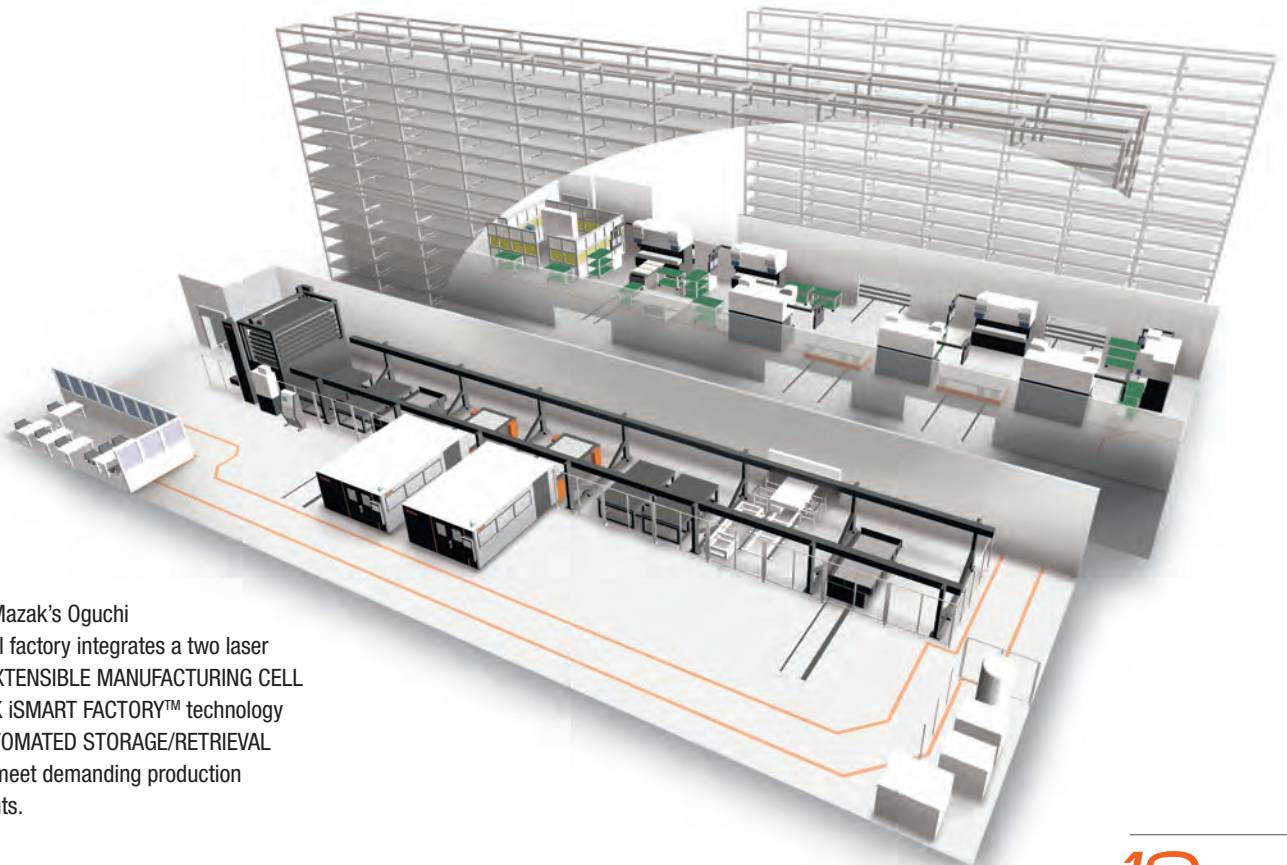

Yamazaki Mazak's Oguchi sheet metal factory integrates a two laser machine EXTENSIBLE MANUFACTURING CELL and MAZAK iSMART FACTORY™ technology into an AUTOMATED STORAGE/RETRIEVAL system to meet demanding production requirements.

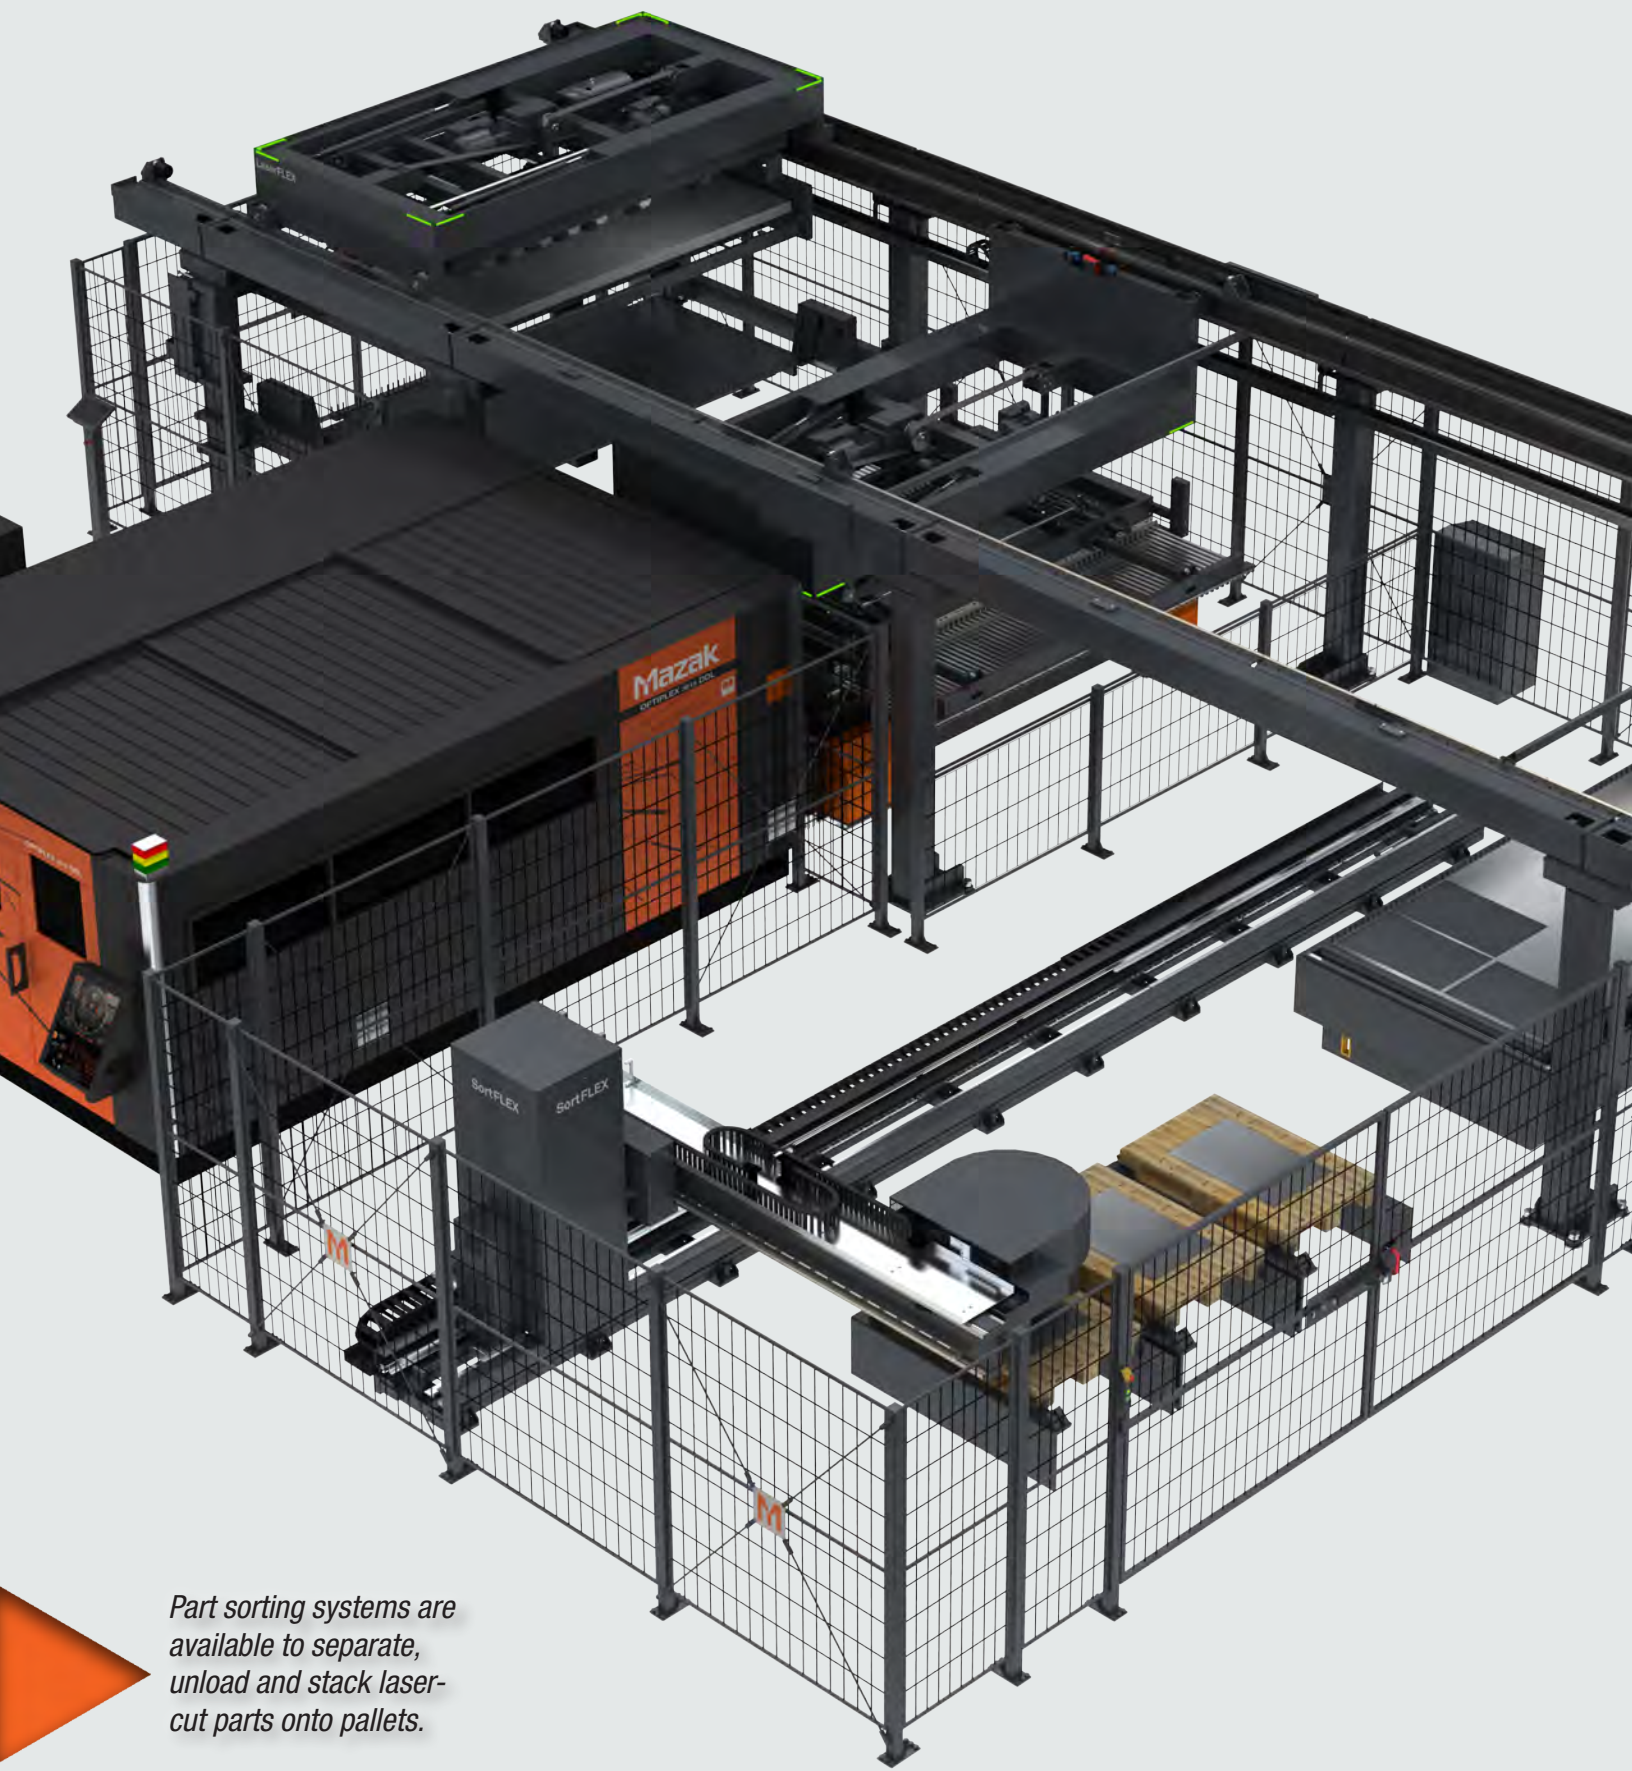

Part sorting systems are available to separate, unload and stack laser-cut parts onto pallets.

ADDITIONAL PRODUCTIVITY SOLUTIONS

Watch the Additional Productivity
Solutions Demo Video



EXPANDED CAPABILITIES FOR LASER MACHINE MATERIAL HANDLING

A series of modular components are available that can extend the range of application, facilitate throughput and improve the overall efficiency of your laser automation cell. The solutions on this page are a few of the most common components utilized.

CONVEYORS

Conveyors are available in belt type for single sheet unloading of up to 5mm thick material and metal type for thicker material over 5mm. It allows for immediate access to a cut sheet outside of the safety fence and it permits you to safely move on to the next process in your production.

OVER/UNDER CARTS

Carts are available in 3,000 kg and 5,000 kg capacities. They enable the operator to access a hot job immediately after the laser-cut or provide the ability to stack cut sheets in unattended operation.

DESCENDING SCISSOR TABLE

Scissor tables allow stacking of laser-cut sheets by lowering the table height after each sheet is unloaded. They are available in 3,000 kg and 5,000 kg capacities.

LABELER

A simple labeling function is available using a Zebra inkjet printer for easy part sorting after the laser-cut operation. The unit offers black & white print only with capability to print simple geometry and bar code printing as an option.

4-PALLET UNLOAD TOWER

A mini unload tower equipped with 4 buffer unload pallets for unattended operation can stack completed work sheets. The operator can remove an unload pallet stacked with cut sheets by opening the tower gate and picking up the pallet with a fork lift.

8-PALLET UNLOAD TOWER

A mini unload tower with 2 x 4-pallet towers on both sides of the unload lifter provides more cut sheet stacking capacity.


PART SORTING SYSTEMS

Mazak automation can be designed to incorporate systems to separate parts and automatically load them onto pallets in production environments.

For information on our extensive range of additional productivity solutions or for special engineered solutions to meet your special requirements, please contact your Mazak representative.

Mazak iSMART Factory™

Technology that helps manage real-time machine and factory performance.

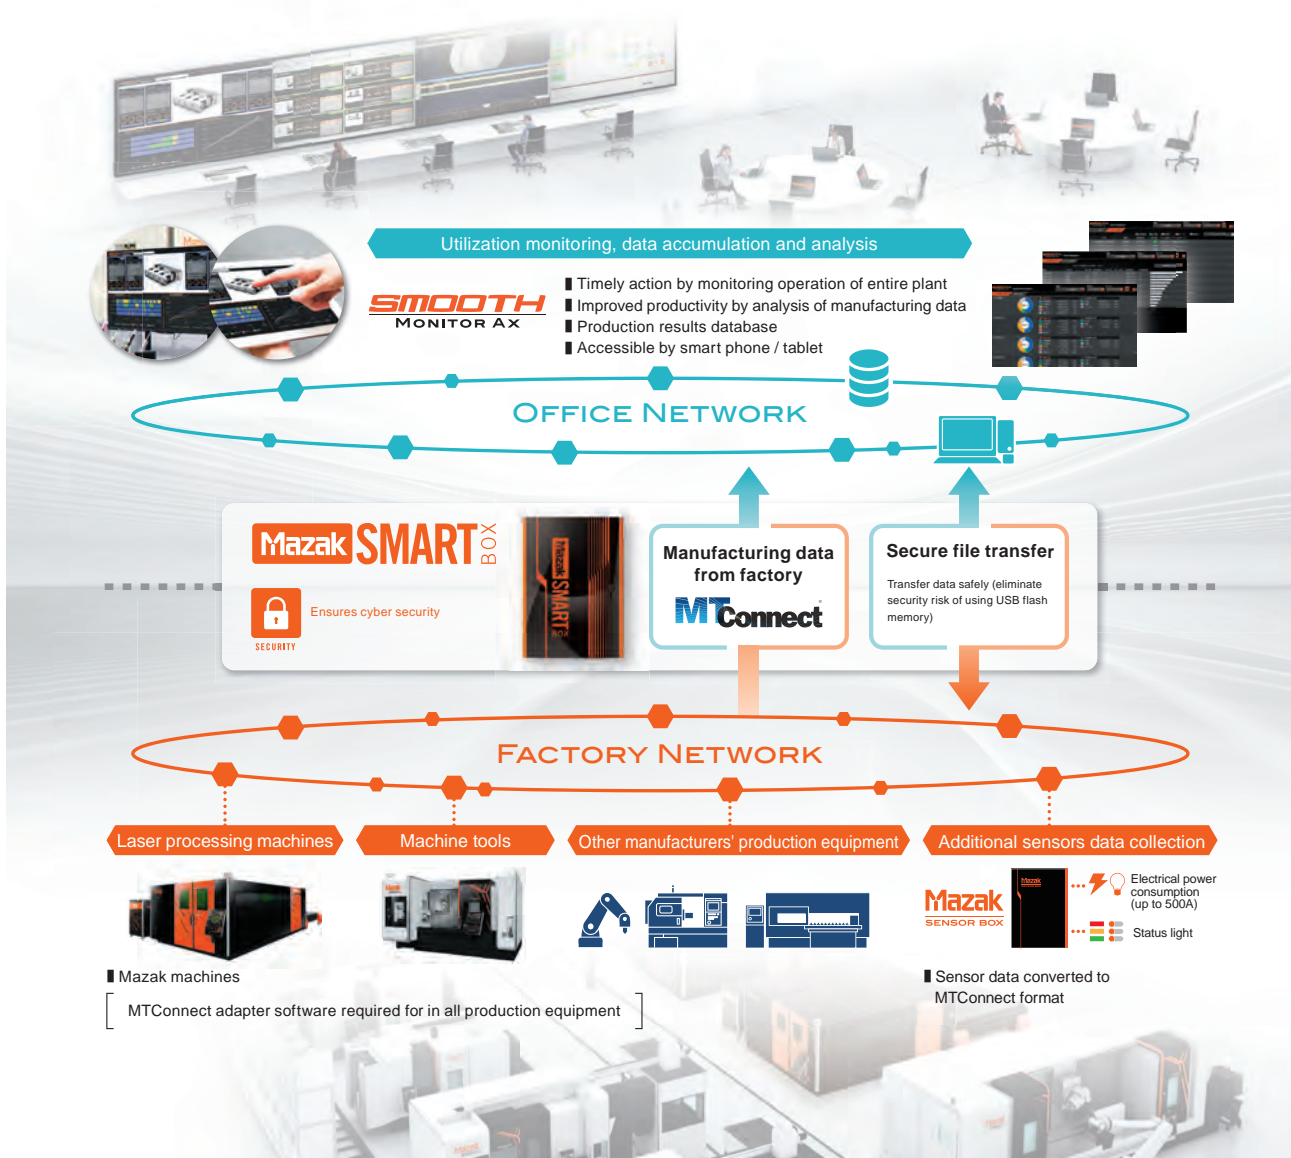

TAKE RAW DATA, READ AND ANALYZE IT, THEN TURN IT INTO ACTIONABLE INFORMATION

An element of the Mazak iSMART Factory™ concept is the ability to utilize software that enables you to visualize the performance of cells, departments and the overall plant as compared to historical or target performance. These insights are the real-time tools that utilize IoT technology that helps enable fabricators to manage the process rather than reacting to historical reporting.

- See the productivity and increased profitability as it happens in real-time
- Productivity problems can be identified fast - accelerating resolution
- Plant-wide productivity increases in the range of 10% to 50%
- Dashboard metrics can be available for everyone on the shop floor to see

Mazak iSMART Factory™ offers an industrial internet platform solution for manufacturing including hardware and software that connects directly to manufacturing equipment. It is designed to monitor every machine in your shop, CNC machines, non-CNC machines, fabrication centers and manual processes, all tied together in a production process manufacturing execution system.

Machine monitoring delivers instantaneous, automatic and timed proactive email and text alerts to minimize downtime. Detailed analyses of downtime root causes points to areas requiring more operator training. Identification and removal of unnecessary optional stops helps recover lost production time.

Smooth Monitor AX

A software solution that gives you shop floor visibility and reporting

Smooth Monitor AX monitors machine operation status by connecting machines to a digital network. You can access operating status and metrics at a computer station, on a tablet or a cell phone.

Mazak SMARTBOX™

Secures data in an IoT environment

The Mazak SMARTBOX™ enables connectivity of machines and other production equipment to provide enhanced monitoring and analytical capabilities including advanced cyber security protection. Mazak SMARTBOX™ is specially designed for IoT by preventing unauthorized access.

MTConnect®

Digital information protocol for data transfer

MTConnect® is an open-source, royalty-free manufacturing protocol that easily connects devices and systems from different suppliers to capture and share information in a common format, such as XML. Mazak has incorporated this protocol within our machines to help standardize and simplify communication. It is a cornerstone in the implementation of Mazak iSMART Factory™ capabilities.

Mazak SENSOR BOX

Helps convert sensor signals into MTConnect® compatible outputs

Mazak SENSOR BOX expands monitoring capabilities to legacy machines and auxiliary devices. Sensors can include signal light status, coolant levels, temperatures, power consumption and other critical information. Sensor signals are converted in to MTConnect® protocol and communicated to Smooth Monitor AX.

Mazak

OPTONICS CORP.

www.mazakoptonics.com

2725 Galvin Court, Elgin, Illinois 60124 | 847.252.4500



- Specifications are subject to change without notice.
- This product is subject to all applicable export control laws and regulations.
- The accuracy data and other data presented in this catalog were obtained under specific conditions. They may not be duplicated under different conditions. (room temperature, workpiece materials, tool material, cutting conditions, etc.)
- Unauthorized copying of this catalog is prohibited.